DS-K3H4411-120
Pro Full Height Turnstile



Full height turnstile with high reliability and suitable for outdoor use. The waterproof design of the whole structure and the segmented installation design make the installation and maintenance of this product very convenient. In addition, the hydraulic shock absorber can ensure smooth and quiet operation.

- LED indicates the passing direction(forbidden or available).
- When the power is cut off, the system will automatically unlock the brake levers into a free-passing mode to facilitate the evacuation of people.
- Valid passing duration settings: System will cancel the passing permission if a person does not pass through the lane within the valid passing duration.
- There is a DIP switch on the control panel, which adjusts the passage delay time.
- Support bi-directional passing through.


▪ Specification


System	
MCBF	More than 3 million times
Motor	NA
General	
Throughput	More than 30 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	650mm
Pedestal material	SUS304 stainless steel 1.5mm(0.06'') Stainless steel pipe 1.2mm(0.05'')
Power supply	100 to 240 VAC; 50 to 60 Hz
Working temperature	-15℃ ~55℃(5℉ ~131℉)
Working humidity	10% to 90% (No Condensing)
Dimensions	Without package: 1630mm x 1580mm x 2300mm(64.2'' x 62.2'' x 90.6'') With package: 2100mm x 1290mm x 1240mm(82.7'' x 50.8'' x 48.9'')
Application environment	Indoor and outdoor
Weight	Without package: 220 kg (485 lbs) With package: 320 kg (705 lbs)
Rotation angle	120°


▪ Available Model

DS-K3H4411-120

▪ Dimension

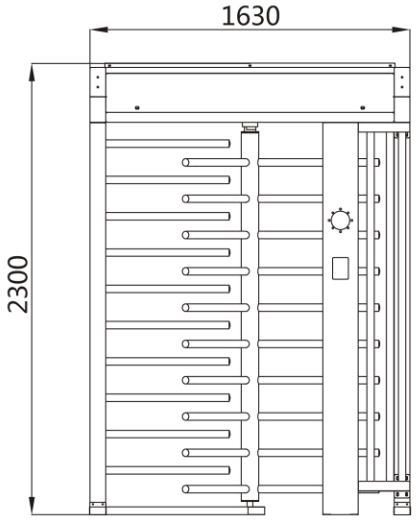

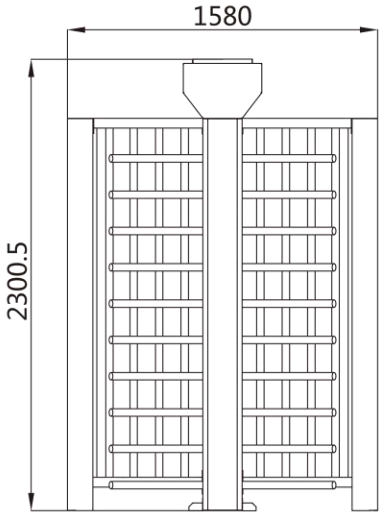

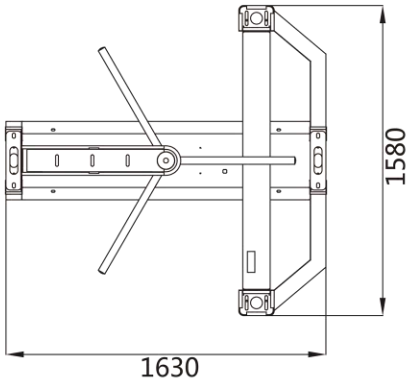

▪ Accessory

▪ Optional

H44xx-Movement kit	DS-K1T671MF-L	DS-K1T671M-L	DS-K1T671M	DS-K1T671
				

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®